


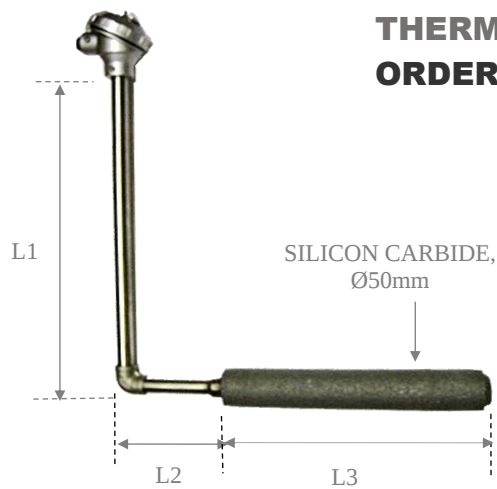

ES model

ES - 1 - 2 - 3 4 5 6 7

Eg: ES Model, Type K Thermocouple, Head Enclosure-D2 design, UnGrounded, L1=300mm, L2=75mm, Length L3 = 12inch (305mm) Silicon Carbide Ø50mm, Class 2
Order Code : ES-K-D2-U300-75-305CL2

1 CALIBRATION

Single

K: K

N: N

2 HEAD ENCLOSURE DESIGN (See Accessories section for Enclosure design)

D2: Standard Alloy Aluminum

3 JUNCTION

U: Ungrounded

4 LENGTH (L1)

(Specify L1 Length accordingly)

250 : 250mm

300 : 300mm

350 : 350mm

5 LENGTH (L2)

(Specify L2 Length accordingly)

75 : 75mm

100 : 100mm

6 SILICON CARBIDE LENGTH (L3)

305 : 12 Inch (305mm)

445: 17.5 Inch (445mm)

470: 18.5 Inch (470mm)

521: 20.5 Inch (521mm)

610: 24 Inch (610mm)

7 TOLERANCE

CL1 : Class 1

CL2 : Class 2 (Industrial Standard)

Remarks: Not all combination are available however we will offer the nearest to your requirement